


X-TENUATOR® | REDIRECTIVE, NON-GATING CRASH CUSHION

- COST EFFECTIVE HAZARD PROTECTION
- DESIGNED FOR USE IN PERMANENT OR WORK ZONE APPLICATIONS
- NCHRP 350 TL-3 ACCEPTED



PHYSICAL SPECIFICATIONS

Classification	R-NG-S	
Length	24' 9"	7.5 m
Width	22"	560 mm
Height	31 3/16"	788 mm
Weight	1650 lb.	750 kg
Test Level	NCHRP 350	TL-3

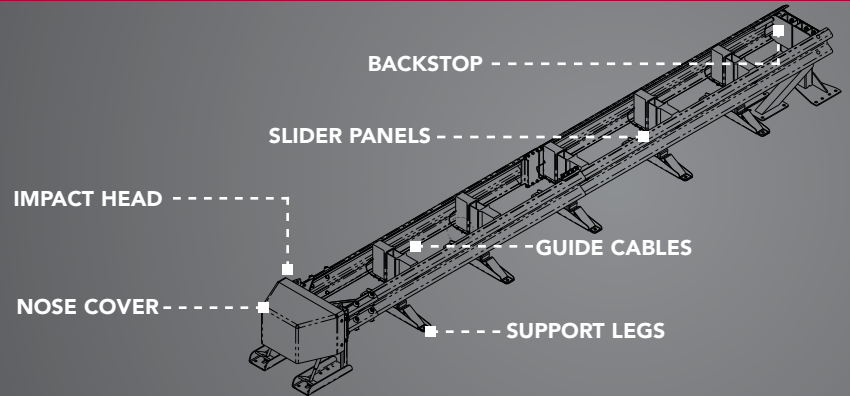

REDIRECTIVE, NON-GATING PERFORMANCE TO SHIELD GUARDRAIL OR THE END OF CONCRETE BARRIERS

The Redirective, Non-Gating, Sacrificial (R-NG-S) X-TENUator Crash Cushion features excellent impact performance at an affordable price. Utilizing superior engineering design, the X-TENUator Crash Cushion provides the life saving performance of a Redirective Non-Gating crash cushion without the high cost. The X-TENUator System has been designed to be installed permanently and is also approved to be used on asphalt in work zones where Redirective Non-Gating performance is required. Standard transition options and narrow footprint make the X-TENUator System ideal for shielding roadside hazards, and reducing inventory costs.

FREQUENTLY ASKED QUESTIONS

Can the X-TENUator System be attached to standard guardrail?

Yes, the X-TENUator System has been designed to be attached to single and double spaced guardrail.

Can the X-TENUator System be attached to concrete barrier?

Yes, due to its freestanding backup the X-TENUator System can be attached to concrete barrier.

Can the X-TENUator System be installed on asphalt?

Yes, the X-TENUator System can be used on an asphalt foundation with additional anchors.

Can the X-TENUator System be used in a work zone?

Yes, The X-TENUator System has been designed to be used in temporary applications to shield narrow hazards such as portable concrete barrier.

FEATURES

- » Low cost hazard protection
- » 26 ground anchors required for concrete installations
- » Accepted for installation on asphalt
- » Attaches to single faced guardrail, double faced guardrail and concrete barrier
- » Can be attached to concrete barrier with standard W-Beam transitions

DISTRIBUTED BY:



Lindsay Transportation Solutions Sales and Services, Inc.

180 River Road • Rio Vista, CA 94571 • +1 707.374.6800 U.S. Toll Free: 888.800.3691 • www.barrriersystemsinc.com

General details for the X-TENUator System are subject to change without notice to reflect improvements and upgrades.

Additional information is available from Lindsay Transportation Solutions Sales and Services, Inc. © Lindsay Transportation Solutions, Inc.

PT # XTEN04-03252013